




Model Ref.	Power (tcW)	Lumens (P/W)	Luminaire Output (lm)	Colour	Dimension	IP Rating
HU/12W/3K	12	108	1305	3000K	∅ 425mm x 85mm	IP20
HU/12W/4K	12	113	1365	4000K	∅ 425mm x 85mm	IP20
HU/16W/3K	16	120	1925	3000K	∅ 425mm x 112mm	IP20
HU/16W/4K	16	126	2025	4000K	∅ 425mm x 112mm	IP20
HU/18W/3K	18	94	1700	3000K	∅ 425mm x 122mm	IP20
HU/18W/4K	18	99	1782	4000K	∅ 425mm x 122mm	IP20
HU/20W/3K	20	131	2625	3000K	∅ 425mm x 135mm	IP20
HU/20W/4K	20	137	2750	4000K	∅ 425mm x 135mm	IP20
HU/22W/3K	22	113	2490	3000K	∅ 425mm x 111mm	IP20
HU/22W/4K	22	118	2605	4000K	∅ 425mm x 111mm	IP20
HU/25W/4K	25	104	2600	4000K	∅ 425mm x 111mm	IP20
HU/31W/3K	31	84	2625	3000K	∅ 425mm x 111mm	IP20
HU/31W/4K	31	88	2750	4000K	∅ 425mm x 111mm	IP20

**Key Features**


- LED bulkhead
- Built around the Tridonic CLE LED module
- 25W Version Only available in 4000K
- Opal polycarbonate diffuser to minimise glare and LED spotting
- Integrated microwave presence detector option
- Emergency and dimming options
- Life >60,000 hours (L70/F10)

**Please select from the options below**

Dali	/DA
Emergency	/EM
Dali Emergency	/DA/EM
DALI Emergency Empro	/DA/EMPRO
Sensor On/Off	/MS
Sensor Dim 10/100%	/CRDIM
Chrome	/CHR

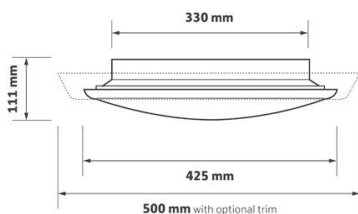


Options




**/ECO**  
SwitchDIM, DALI or DSI



**/EM**  
Integral emergency conversion



**/SO**  
Integral motion sensor on/off

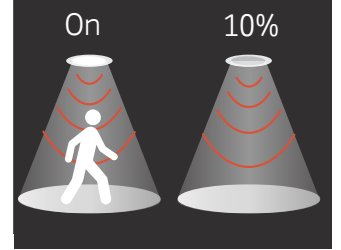


**/SD**  
Integral motion sensor on/10% dim

Accessories



**DB001**  
Gloss white trim

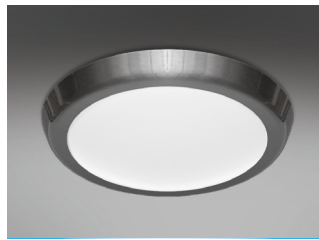

**DB002**  
Brushed aluminium effect trim



**DB003**  
Chrome trim



**Product Variation**  
**/EMS /EMD**  
Integral emergency conversion

