




Model Ref.	Power (tcW)	Luminaire Output (lm)	Colour	Dimension	Cut Out	IP Rating
<b>OXF/ADJ/8W/3K</b>	8	1025	830	ø 186mm x 102mm	ø 176mm	IP20
<b>OXF/ADJ/8W/4K</b>	8	1075	840	ø 186mm x 102mm	ø 176mm	IP20
<b>OXF/ADJ/14W/3K</b>	14	1725	830	ø 186mm x 102mm	ø 176mm	IP20
<b>OXF/ADJ/14W/4K</b>	14	1800	840	ø 186mm x 102mm	ø 176mm	IP20
<b>OXF/ADJ/19W/3K</b>	19	2375	830	ø 186mm x 102mm	ø 176mm	IP20
<b>OXF/ADJ/19W/4K</b>	19	2450	840	ø 186mm x 102mm	ø 176mm	IP20
<b>OXF/ADJ/28W/3K</b>	28	3150	830	ø 186mm x 102mm	ø 176mm	IP20
<b>OXF/ADJ/28W/4K</b>	28	3275	840	ø 186mm x 102mm	ø 176mm	IP20

**Key Features**

- Professional gimbal with a wide choice of options and accessories
- Incorporates Tridonic LED module and driver systems
- UGR <19 and ETL compliant variants
- Multifaceted 40° reflector supplied as standard
- Height under 102 mm using optimised passive thermodynamics
- Emergency, DALI and dimming options
- 5 year warranty

**Please select from the options below**

Dali	/DA
Switch Dim / Mains	/SD
DSI	/DSI
Emergency	/EM
Dali Emergency	/DA/EM
DALI Emergency Empro	/DA/EMPRO
Black Bezel	/BLK
25° multi- faceted	/MF25
60° multi- faceted	/MF60
40° specular	/SP40
50° satin	/SA50
Bluetooth wireless control - inc dim	/BTC

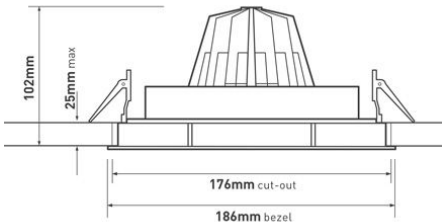

**Options**



**/BK**  
Black



**/MF25**  
25° Multi-faceted reflector



**/MF60**  
60° Multi-faceted reflector



**/SP40**  
40° Specular reflector



**/SA50**  
50° Satin reflector



**/EM**  
3h EM conversion  
c/w lizard indicator



**/EMD**  
3h DALI / ST EM conversion  
c/w lizard indicator




**/EMI**  
3h EM conversion  
c/w integral indicator



**/EMDI**  
3h DALI / ST EM conversion  
c/w integral indicator



**/TOP**  
Tridonic Excite Driver - 100K hours  
I-Select, Loop in - loop out



**/ECO**  
SwitchDIM, DALI or DSI



**/BTC**  
Casambi Bluetooth wireless  
network (inc dim)

**Accessories**



**TA210/BLACK**  
Frosted vertical halo



**TA241**  
Centre etched glass

