


Model Ref.	Power (tcW)	Luminaire Output (lm)	Colour	Dimension	IP Rating
NOL/1/SF/SQ/10W/3K	10	1025	830	∅ 225mm x 152mm	IP20
NOL/1/SF/SQ/9W/4K	9	1025	840	∅ 225mm x 152mm	IP20
NOL/1/SF/SQ/19W/3K	19	2000	830	∅ 225mm x 152mm	IP20
NOL/1/SF/SQ/18W4K	18	2000	840	∅ 225mm x 152mm	IP20
NOL/1/SF/SQ/31W/3K	31	3000	830	∅ 225mm x 152mm	IP20
NOL/1/SF/SQ/29W/4K	29	3000	840	∅ 225mm x 152mm	IP20

Key Features

- Fully adjustable single LED surface mounted framelight
- Twin version available
- Medium beam multi-faceted reflector as standard
- Paired with Tridonic system for outstanding efficacy
- Beam angle and colourway options
- Two gimbal fixing positions for added flexibility
- Excellent luminaire efficacy of up to 112.9 lm/W
- Life up to >60,000 hours (L70 / F10)

Please select from the options below

- Dali **/DA**
- Switch Dim / Mains **/SD**
- DSI **/DSI**
- Black body and gimbal **/BBGB**
- Narrow Beam **/NB**
- Wide Beam **/WB**
- High colour rendering option (Ra 90) **/R9**

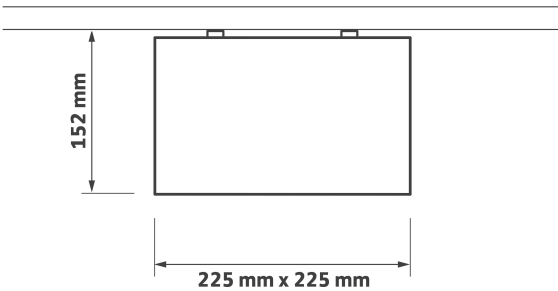


Options



/NB
Narrow beam reflector



/WB
Wide beam reflector



/ECO
SwitchDIM, DALI or DSI



/R9
High colour rendering (Ra 90)



/BK
Black body and gimbal

Also Available



Product variations
Other colours and specifications
available on request



Twin available



Recessed available

