




Model Ref.	Power (tcW)	Luminaire Output (lm)	Colour	Dimension	Cut Out	IP Rating
PAR/8W/27K	8	600	927	ø 85mm x 95mm	ø 81mm	IP44
PAR/6.5W/3K	6.5	675	830	ø 85mm x 95mm	ø 81mm	IP44
PAR/6.5W/4K	6.5	700	840	ø 85mm x 95mm	ø 81mm	IP44
PAR/10W/27K	10	850	927	ø 85mm x 95mm	ø 81mm	IP44
PAR/8W/3K	8	850	830	ø 85mm x 95mm	ø 81mm	IP44
PAR/8W/4K	8	900	840	ø 85mm x 95mm	ø 81mm	IP44


Key Features

- Low glare architectural downlight
- Discreet minimal bezel, die-cast from pure aluminium
- Matt black darklight baffle, developed to minimise glare
- Fitted with an integral IP44 protective lens as standard
- Precision moulded 40° reflector
- Tridonic LED engine and driver system
- Excellent thermally optimised 24 super-fin die-cast heatsink
- Short circuit, overload and temperature protection


Please select from the options below

- Dali /DA
- Switch Dim / Mains /SD
- DSI /DSI
- Emergency /EM
- Dali Emergency /DA/EM
- DALI Emergency Empro /DA/EMPRO
- Narrow beam reflector 20° /NB
- Plaster-in bezel version /PI
- Ra90 High colour rendering /9
- Casambi wireless network (inc dim) /BTC /BTC
- White Bezel /WBZ
- Black Bezel /BBZ
- White Baffle /WBF
- Black Baffle /BBF

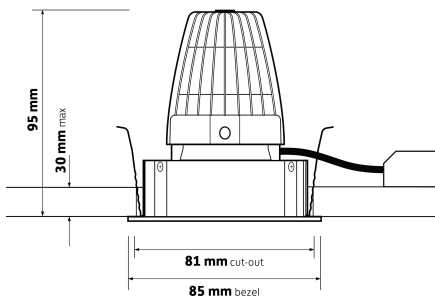



/ECO
SwitchDIM, DALI or DSI



/MDIM
Mains dimming



/NB
20° Narrow beam reflector



/EM
EM conversion



/EMD
DALI and self test EM conversion




/EMi
EM conversion with integral indicator



/EMDi
DALI/self test EM conversion with integral indicator



/R9
Ra90 High colour rendering



/BTC
Casambi wireless network (inc dim)




/PI
Plaster-in bezel version (cut-out ø81 mm)



/WSB
White softlight baffle



Product variations
Other colours and specifications available on request

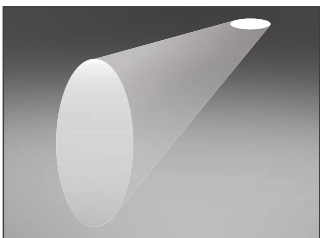

Wall wash available
Please see 131 Series datasheet



Square available
Please see 132 Series and 133 Series datasheets

