


Model Ref.	Power (tcW)	Lumens (P/W)	Luminaire Output (lm)	Colour	Dimension	UGR Rating	IP Rating	MacAdam Step
ROB/5x5/UGR/3K	25	118	2950	3000K	ø 495mm x 10.5mm	19	IP20	<3
ROB/5x5/UGR/4K	25	120	3000	4000K	ø 495mm x 10.5mm	19	IP20	<3

Key Features

- 500 x 500 lay in panel
- Low glare UGR <19 for LG7 compliance option
- Lumen maintenance up to @ 50,000 hours
- Self-extinguishing TP(a) diffuser as standard
- DALI2, dimming and EM options
- Power Factor 0.95
- 5 year warranty

TECHNICAL DRAWINGS

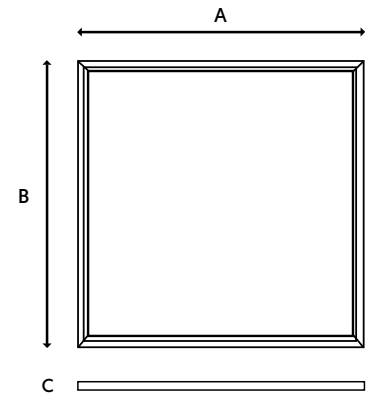

A = 495mm C = 10.5mm
B = 495mm

Please select from the options below

Dali	/DA
Emergency	/EM
Dali Emergency	/DA/EM
DALI Emergency Empro	/DA/EMPRO
Suspension Kit	/SUS
Surface Mount Kit	/SFKIT
Recessed Kit	/RECKIT

