




Model Ref.	Power (tcW)	Lumens (P/W)	Luminaire Output (lm)	Colour	Dimension	Cut Out	IP Rating
OXF/8W/3K	8	128	1025	830	∅ 130mm x 99mm	110mm	IP20
OXF/8W/4K	8	134	1075	840	∅ 130mm x 99mm	110mm	IP20
OXF/14W/3K	14	123	1725	830	∅ 130mm x 99mm	110mm	IP20
OXF/14W/4K	14	128	1800	840	∅ 130mm x 99mm	110mm	IP20
OXF/19W/3K	19	125	2375	830	∅ 130mm x 99mm	110mm	IP20
OXF/19W/4K	19	128	2450	840	∅ 130mm x 99mm	110mm	IP20
OXF/28W/3K	28	112	3150	830	∅ 130mm x 99mm	110mm	IP20
OXF/28W/4K	28	116	3275	840	∅ 130mm x 99mm	110mm	IP20

Key Features

- Professional downlight with a wide choice of options and accessories
- Incorporates Tridonic LED module and driver systems
- UGR <19 and ECA compliant variants
- Multi-faceted 40° reflector supplied as standard
- Height under 100mm using optimised passive thermodynamics
- Decorative and IP65 bezel options
- Emergency, DALI and dimming options
- 5 year warranty

Please select from the options below

Dali	/DA
Switch Dim / Mains	/SD
DSI	/DSI
Emergency	/EM
Dali Emergency	/DA/EM
DALI Emergency Empro	/DA/EMPRO
Bezel	/WH/BLK/CH/GY/BWH
25° Multi- faceted	/25MF
60° Multi- faceted	/60MF
40° Specular	/40SP
50° Satin	/50SA
Bluetooth wireless control - inc dim	/BTDIM

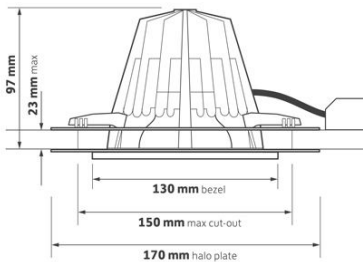

Options



/MF25
25° Multi-faceted reflector



/SP40
40° Specular reflector



/SA50
50° Satin reflector



/MF60
60° Multi-faceted reflector



/EM
EM conversion with remote indicator



/EMD
DALI and Self-test EM conversion with remote indicator




/EMI
EM conversion with integral indicator



/EMDI
DALI and Self-test EM conversion with integral indicator



/TOP
Tridonic Excite Driver - 100K hours
I-Select, Loop in - loop out



/ECO
SwitchDIM, DALI or DSI



/BTC
Casambi Bluetooth wireless network
(inc dim)



Accessories



TA200/WH
White bezel - RAL9010



TA200/CH
Chrome bezel



TA200/GY
Grey bezel - RAL9006



TA200/BL
Black bezel - RAL9005



TA200/BWH
Brilliant white bezel - RAL9016



TA225/WH
White bezel drop clear halo



TA226/WH
White bezel drop opal halo



AT200/WH
White anti-tamper bezel



IP65/001/130
IP65 bezel clear poly



TA240
IP54 Clear glass



TA241
IP54 Centre etched glass



TA242
IP54 Fully etched glass



TA220/FROST
Frosted hi-light



TA220/BLUE
Blue hi-light



Accessories



TA210/BLACK
Black snoot



TA210/FROST
Frosted snoot



TA210/BLUE
Blue snoot



TA208
Kick reflector



PI200
Installed kit and fitting. Please see PI200 datasheet for details.




PI200
Plaster-in kit. Please see PI200 datasheet for details.



HALOKIT.001
Halo kit - maximum cut-out 150 mm



GF208 / GF218
Anti-tamper driver / Anti-tamper bit



Product variations
Plug and Sockets

