
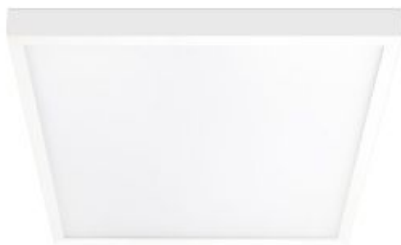


| Model Ref. | Power (tcW) | Lumens (P/W) | Luminaire Output (lm) | Colour | Dimension | UGR Rating | IP Rating | MacAdam Step |
|----------------|-------------|--------------|-----------------------|--------|----------------|------------|-----------|--------------|
| ROB/UGR/6x6/3K | 30 | 118 | 3540 | 3000K | ∅ 595mm x 32mm | 19 | IP20 | <3 |
| ROB/UGR/6x6/4K | 30 | 120 | 3600 | 4000K | ∅ 595mm x 32mm | 19 | IP20 | <3 |

Key Features

- 600 x 600 lay in panel
- Low glare UGR <19 for LG7 compliance option
- Lumen maintenance up to @ 50,000 hours
- Self-extinguishing TP(a) diffuser as standard
- DALI2, dimming and EM options
- Power Factor 0.95
- 5 year warranty

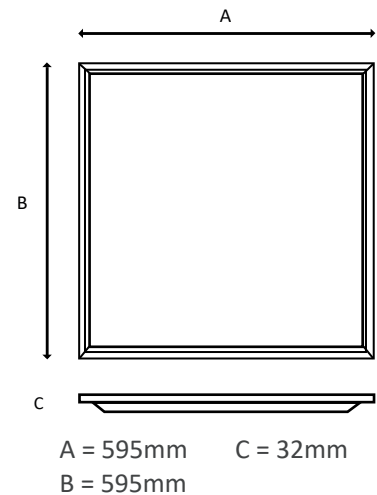

Please select from the options below

| | |
|----------------------|-----------|
| Dali | /DA |
| Emergency | /EM |
| Dali Emergency | /DA/EM |
| DALI Emergency Empro | /DA/EMPRO |
| Suspension Kit | /SUS |
| Surface Mount Kit | /SFKIT |
| Recessed Kit | /RECKIT |

