




Model Ref.	Power (tcW)	Lumens (P/W)	Luminaire Output (lm)	Colour	Dimension L x W x H	IK Rating	IP Rating
CRO/25W/4K	25	100	2500	4000K	1262mm x 72mm x 78mm	IK07	IP65
CRO/50W/4K	50	100	5000	4000K	1262mm x 103mm x 78mm	IK07	IP65
CRO/35W/4K	35	100	3500	4000K	1562mm x 72mm x 78mm	IK07	IP65
CRO/70W/4K	70	100	7000	4000K	1562mm x 103mm x 78mm	IK07	IP65
CRO/33W/4K	33	124	4100	4000K	1828mm x 94mm x 90mm	IK07	IP65
CRO/69W/4K	69	112	7770	4000K	1828mm x 129mm x 90mm	IK07	IP65
CRO/D/17W/4K	17	147	2500	4000K	1250mm x 78mm x 78mm	IK08	IP65
CRO/D/35W/4K	35	131	4600	4000K	1220mm x 115mm x 78mm	IK08	IP65
CRO/D/28W/4K	28	142	4000	4000K	1570mm x 78mm x 78mm	IK08	IP65
CRO/D/50W/4K	50	140	7000	4000K	1570 mm x 115mm x 78mm	IK08	IP65
CRO/D/36W/4K	36	141	5100	4000K	1870 mm x 90mm x 78mm	IK08	IP65
CRO/D/60W/4K	60	141	8500	4000K	1870 mm x 115mm x 78mm	IK08	IP65

Key Features

- LED IP65 anti-corrosive batten with IK07-8 impact resistance rating
- Robust injection moulded polycarbonate body
- Opal vapour proof high impact diffuser
- High system efficacy to aid compliance with Building Regulations Part L
- Quick release flush mounted fixing clips
- Emergency and Sensor options
- 5 Year Warranty

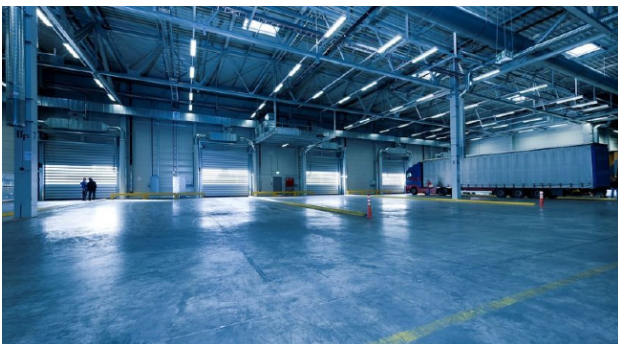

Please select from the options below

Dali	/DA
Microwave	/MS
Corridor Function	/CRDIM
Microwave & Corridor Function Emergency	/MS/CRDIM
M3	/EM
Emergency & Microwave	/EM/MS
Emergency & Corridor Function Emergency,	/EM/CRDIM
Microwave & Corridor Function	/EM/MS/CRDIM

