




Model Ref.	Power (tcW)	Lumens (P/W)	Luminaire Output (lm)	Colour	Dimension	Cut Out	IP Rating
PAR/ADJ/8W/27K	8	75	600	927	ø 85mm x 105mm	81mm	IP44
PAR/ADJ/6.5W/3K	6.5	103	675	830	ø 85mm x 105mm	81mm	IP44
PAR/ADJ/6.5W/4K	6.5	107	700	840	ø 85mm x 105mm	81mm	IP44
PAR/ADJ/10W/27K	10	85	850	927	ø 85mm x 105mm	81mm	IP44
PAR/ADJ/8W/3K	8	106	850	830	ø 85mm x 105mm	81mm	IP44
PAR/ADJ/8W/4K	8	112	900	840	ø 85mm x 105mm	81mm	IP44

Key Features


- Low glare architectural wall wash
- Discreet minimal bezel, die-cast from pure aluminium
- Matt black darklight baffle, developed to minimise glare
- Fitted with an integral IP44 protective lens as standard
- Precision moulded 40° reflector
- Tridonic LED engine and driver system
- Excellent thermally optimised 24 super-fin die-cast heatsink
- Short circuit, overload and temperature protection

Please select from the options below


- Dali /DA
- Switch Dim / Mains /SD
- DSI /DSI
- Emergency /EM
- Dali Emergency /DA/EM
- DALI Emergency Empro /DA/EMPRO
- Narrow beam reflector 20° /NB
- Plaster-in bezel version /PI
- Ra90 High colour rendering /9
- Casambi wireless network (inc dim) /BTC /BTC
- White Bezel /WBZ
- Black Bezel /BBZ
- White Baffle /WBF
- Black Baffle /BBF

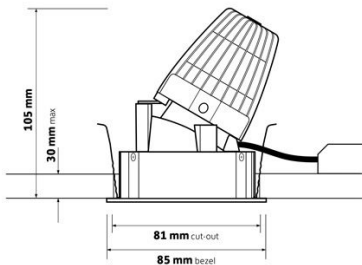

Options



/ECO
SwitchDIM, DALI or DSI



/MDIM
Mains dimming



/NB
20° Narrow beam reflector



/EM
EM conversion



/EMD
DALI and self test EM conversion



/EMi
EM conversion with integral indicator



/EMDi
DALI/self test EM conversion with integral indicator



/R9
Ra90 High colour rendering



/BTC
Casambi wireless network (inc dim)



/PI
Plaster-in bezel version (cut-out ø81 mm)



/WSB
White softlight baffle



/TLT
Tilttable



Product variations
Other colours and specifications available on request



Downlight available
Please see Parker Series datasheet



Square available

