


Technical Drawing



Key Features

- Professional LED 100mm surface can
- 55° reflector as standard
- Finished in RAL9016 brilliant white
- Integral DALI As Standard
- 10% Output In Emergency Mode
- Suspension option
- 5 year warranty
- Fixed Lens
- IP20
- Aluminium Construction
- Photometric data available on request

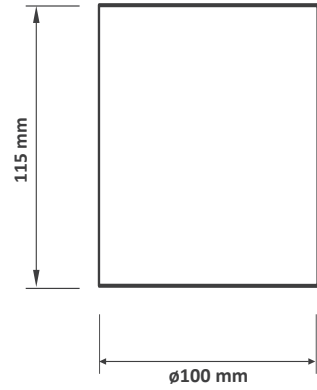

Ordering Information

| Model Ref. | Power (tcW) | Colour | Lm/W | Luminaire Output (lm) | Life (hrs) |
|--------------|-------------|--------|------|-----------------------|------------|
| NOL3100WHI3K | 12 | 3000K | 101 | 1210 | 50,000 |
| NOL3100WHI4K | 12 | 4000K | 104 | 1250 | 50,000 |
| NOL3100BLK3K | 12 | 3000K | 101 | 1210 | 50,000 |
| NOL3100BLK4K | 12 | 4000K | 104 | 1250 | 50,000 |

Please select from the options below

| | |
|-----------------------------|-----------|
| Dali | /DA |
| Remote Emergency | /EM |
| Remote Dali Emergency | /DA/EM |
| Remote Dali Emergency Empro | /DA/EMPRO |
| Black Body RAL9005 | /BK |
| Suspended | /SUSP |

